
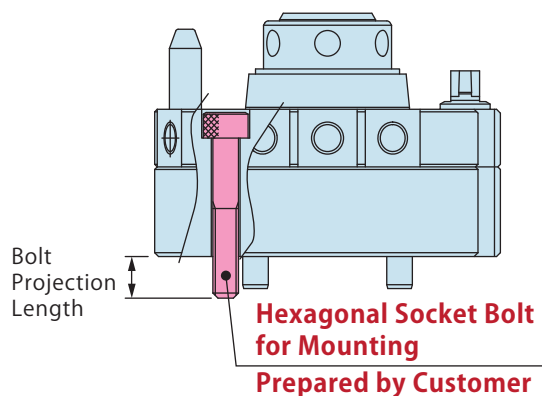


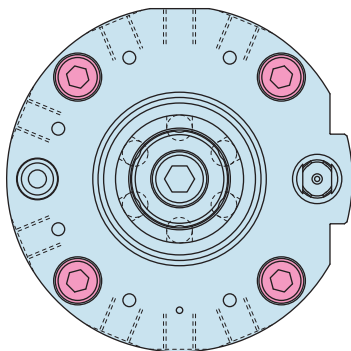

Model No.		SWR0010	SWR0030	SWRY0010	SWR0070	SWR0120	SWR0250
Hexagonal Socket Bolt Size		M3×0.5×16 [Low Head Cap Screw]	M3×0.5×18	M3×0.5×18	M3×0.5×25	M4×0.7×25	M5×0.8×30
Quantity		3	4	3	4	4	4
Bolt Projection Length	mm	4.1	4.6	4.1	6	6.5	9
MISUMI's Model No. Sample※1	ex. 1) Stainless Steel	CBSST3-16	SCB3-18	SCB3-18	SCB3-25	SCB4-25	SCB5-30
	ex. 2) Stainless Steel	-	CSHHA-SUS-M3-18	CSHHA-SUS-M3-18	CSHHA-SUS-M3-25	CSHHA-SUS-M4-25	CSHHA-SUS-M5-30
	ex. 3) Chromoly	CBS3-16	CB3-18	CB3-18	CB3-25	CB4-25	CB5-30
	ex. 4) Chromoly	-	CSHHA-ST-M3-18	CSHHA-ST-M3-18	CSHHA-ST-M3-25	CSHHA-ST-M4-25	CSHHA-ST-M5-30

※1. Supplier, manufacturer and bolt model are for reference.

Model No.		SWR0500	SWR0750	SWR1200	SWR2300	SWRY0135
Hexagonal Socket Bolt Size		M6×1×35	M6×1×35	M8×1.25×40	M10×1.5×55	M4×0.7×35
Quantity		4	6	6	6	8
Bolt Projection Length	mm	10.5	8.2	10.5	15.5	6.5
MISUMI's Model No. Sample※1	ex. 1) Stainless Steel	SCB6-35	SCB6-35	SCB8-40	SCB10-55	SCB4-35
	ex. 2) Stainless Steel	CSHHB-SUS-M6-35	CSHHB-SUS-M6-35	-	-	CSHHA-SUS-M4-35
	ex. 3) Chromoly	CB6-35	CB6-35	CB8-40	CB10-55	CB4-35
	ex. 4) Chromoly	CSHHA-ST-M6-35	CSHHA-ST-M6-35	-	-	CSHHA-ST-M4-35

※1. Supplier, manufacturer and bolt model are for reference.